

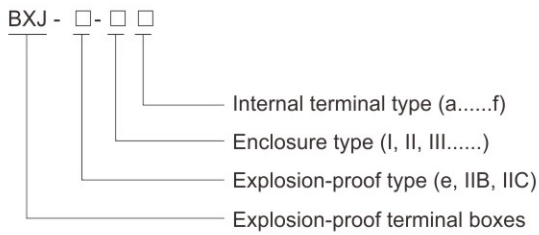
## Terminal Boxes BXJ Series Explosion-proof Terminal Boxes



Ex d IIB

- ◆ Explosion protection to
  - CENELEC
  - IEC
  - NEC
- ◆ Can be used in
  - Zone 1 and Zone 2
  - Zone 21 and Zone 22
  - Class I, Zone 1 and Zone 2
  - Class I, Division 1, Groups A, B, C, D
  - Class I, Division 2, Groups A, B, C, D
- ◆ Three explosion-proof types (Ex e, Ex d IIB and Ex d IIC).
- ◆ Enclosure: Copper-free Aluminium Alloy (carbon steel or stainless steel is optional), powder coated surface.
- ◆ Size and direction of cable entries can be customized on request.

### ■ Catalogue number logic



Ex d IIC



Ex e IIC


# Zones 1&2; 21&22

## Terminal Boxes BXJ-IIB Series Explosion-proof Terminal Boxes


Technical data																			
<b>Explosion-proof terminal boxes(Ex d IIB+H2) BXJ-IIB-□□</b>																			
<b>Explosion protection</b>																			
Global (IECEX)	IECEX CQM 14. 0061X																		
Gas and dust	Ex db IIB+H2 T6 or T5 Gb Ex tb IIIC T80°C or T95°C Db IP66																		
Europe (ATEX)	TÜV CY 17 ATEX 0205970X																		
Gas and dust	⊕ II 2 G Ex db IIB+H2 T6 or T5 Gb ⊕ II 2 D Ex tb IIIC T80°C or T95°C Db IP66																		
<b>Certificates</b>	IECEX; ATEX; CU-TR																		
<b>Conformity to standards</b>	EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC 60079-31																		
<b>Enclosure material</b>	Copper-free Aluminium Alloy (carbon steel or stainless steel is optional), powder coated surface																		
<b>Enclosure colour</b>	Window grey (RAL7040)																		
<b>Terminal</b>	International brand of terminal blocks																		
<b>Exposed fastener</b>	Stainless steel																		
<b>Ambient temperature</b>	T5/T95°C for Tamb: -60°C ≤ Ta ≤ +55°C T6/T80°C for Tamb: -60°C ≤ Ta ≤ +40°C																		
<b>Rated voltage</b>	Max. 800V AC																		
<b>Rated current</b>	<table border="1"> <thead> <tr> <th>Cross section</th> <th>2.5mm<sup>2</sup></th> <th>4mm<sup>2</sup></th> <th>6mm<sup>2</sup></th> <th>10mm<sup>2</sup></th> <th>16mm<sup>2</sup></th> <th>35mm<sup>2</sup></th> <th>70mm<sup>2</sup></th> <th>240mm<sup>2</sup></th> </tr> </thead> <tbody> <tr> <td>Rated current</td> <td>24A</td> <td>32A</td> <td>41A</td> <td>57A</td> <td>76A</td> <td>125A</td> <td>192A</td> <td>400A</td> </tr> </tbody> </table>	Cross section	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>	16mm <sup>2</sup>	35mm <sup>2</sup>	70mm <sup>2</sup>	240mm <sup>2</sup>	Rated current	24A	32A	41A	57A	76A	125A	192A	400A
Cross section	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>	16mm <sup>2</sup>	35mm <sup>2</sup>	70mm <sup>2</sup>	240mm <sup>2</sup>											
Rated current	24A	32A	41A	57A	76A	125A	192A	400A											
<b>Internal&amp;external earthing</b>	I, II, IIb: M6/M6; III, IIIb, IV, IVb, V, Vb, VI, VIb: M6/M8; VII, VIIb: M8/M8																		
<b>Degree of protection</b>	IP66, IP67 (optional)																		
<b>Note</b>	Rated current > 400A on request																		

### Cable entry table

Table of max. number of possible enclosure entries with cable glands DQM-II

	I		II		II b		III		III b		IV		IV b	
	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D
Size	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D
M20 x 1.5	5	8	5	10	5	12	10	12	16	20	12	16	22	30
M25 x 1.5	5	7	5	9	5	10	9	11	12	15	11	14	15	20
M32 x 1.5	2	3	2	4	2	6	7	9	9	12	9	12	12	16
M40 x 1.5	2	2	2	3	2	4	3	4	5	6	4	5	6	9
M50 x 1.5	1	2	1	3	1	3	3	3	4	5	3	4	5	7
M63 x 1.5	1	2	1	2	1	3	2	3	2	3	3	3	3	5

	V		V b		VI		VI b		VII		VII b	
	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D
Size	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D	A/B	C/D
M20 x 1.5	14	21	24	40	19	33	30	50	28	41	45	65
M25 x 1.5	12	19	18	27	16	28	20	36	25	35	30	44
M32 x 1.5	10	15	14	21	13	22	18	30	21	29	25	36
M40 x 1.5	4	7	8	12	7	13	11	18	11	16	15	21
M50 x 1.5	4	5	5	9	6	11	6	10	10	13	12	12
M63 x 1.5	3	5	4	7	3	5	5	9	4	6	7	10

**Note:** For cable entries:  
 1) Please specify the direction and size of each cable entry.  
 2) Cable gland is optional, DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~31.











## Terminal Boxes BXJ-IIB Series Explosion-proof Terminal Boxes

**Selection table of BXJ-IIB series explosion-proof terminal boxes**

Max. cross section of cable connected to terminals is 35mm<sup>2</sup>

See table for max. number of fitted terminals

Enclosure code/Ordering code	Outline	Cross section of cable (mm <sup>2</sup> )						Max. dissipated power (W)	Weight (kg)
		2.5 (a)	4 (b)	6 (c)	10 (d)	16 (e)	35 (f)		
I		16	15	12	10	8	—	9.8	7.50
II		22	18	14	12	10	—	14.4	9.00
II b		28	25	20	15	12	—	14.4	10.00
III, IIIb		32	30	24	20	16	8	22.2	16.00 (III)
		50	46	40	—	—	—	22.2	19.80 (III b)
IV, IVb		45	40	34	28	24	16	25.2	16.50 (III)
		80	70	60	40	—	—	25.2	20.50 (III b)
		80	70	60	40	—	—	25.2	25.50 (IV)
									30.00 (IV b)
									26.30 (IV)
									31.00 (IV b)









## Terminal Boxes BXJ-IIB Series Explosion-proof Terminal Boxes

**Selection table of BXJ-IIB series explosion-proof terminal boxes**

Max. cross section of cable connected to terminals is 240mm<sup>2</sup>

See table for max. number of fitted terminals

Enclosure code/ Ordering code	Outline	Cross section of cable (mm <sup>2</sup> )								Max. dissipated power (W)	Weight (kg)
		2.5 (a)	4 (b)	6 (c)	10 (d)	16 (e)	35 (f)	70 (g)	240 (h)		
V, Vb		60	56	48	36	30	20	---	---	55.3	38.00 (V)
											43.00 (Vb)
		110	100	90	70	66	---	---	---	55.3	39.00 (V)
											44.00 (Vb)
VI, VIb		80	70	60	50	35	20	10	6	64.5	50.00 (VI)
											56.50 (VIb)
		160	140	120	100	70	---	---	---	64.5	51.50 (VI)
											58.00 (VIb)
VII, VIIb		90	80	70	60	40	25	15	9	93.1	80.00 (VII)
											88.50 (VIIb)
		180	160	140	120	80	---	---	---	93.1	82.00 (VII)
											91.50 (VIIb)

