

# FAD-T 系列防水防尘防腐工矿灯(A型)

## Series Weatherproof Industrial Light Fittings (Type A)



Waterproof



Dustproof




Corrosionproof

Weatherproof Light Fittings  
防水防尘防腐灯具系列



GB IEC EN GOST

### ◆ 型号规格含义/Catalogue number logic

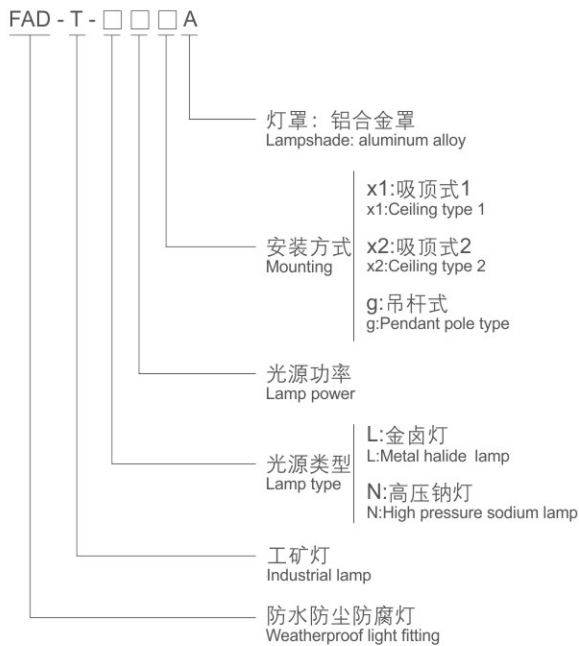


### ◆ 产品特点/Product features

- ◇ 铝合金压铸壳体，表面高压静电喷塑；
- ◇ 铝合金灯罩；
- ◇ 镇流器、光源、内部附件与灯具一体式设计，使用安装方便；
- ◇ 防腐等级：WF1、WF2（可选）。
- ◇ Die-casting aluminum alloy enclosure, high-voltage electrostatic powder coated surface.
- ◇ Aluminum alloy lampshade.
- ◇ The ballast, lamp, internal components and lamp are of integrated type, easy for mounting.
- ◇ Corrosion-proof: WF1, WF2 (Optional).

### ◆ 配光曲线/Luminous intensity distribution

cd/1000lm

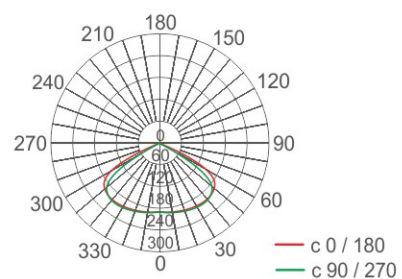




Weatherproof Light Fittings  
防水防尘防腐灯具系列

### ◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards
额定电压 Rated voltage	220V AC 50Hz、60Hz(可选/Optional)	220V~240V AC 50Hz、60Hz(可选/Optional)
环境温度 Ambient temperature	-40℃~+55℃ (-60℃~+60℃ 可选/Optional)	
防护等级 Degree of protection	IP65	
引入装置 Cable gland	G3/4"引入规格, 适合Φ10mm~Φ14mm电缆 G3/4" entry specification, suitable for cable of Φ10mm~Φ14mm	
接线端子 Terminal	≤ 2.5mm <sup>2</sup> 导线可靠连接 / ≤ 2.5mm <sup>2</sup> reliable wire connection	
安装方式 Mounting	吸顶式1(x1)、吸顶式2(x2)、吊杆式(g) Ceiling type1(x1)、Ceiling type2(x2)、Pendant pole type(g)	
壳体类型 Enclosure type	I	II
光源功率 Lamp power	N70W N110(100)W L70W L100W L150W	N150W N250W L250W N400W L400W
灯座规格 Lampholder specification	E27	E40
灯具重量 Weight of light fitting	4.5kg	12kg

### ◆ 外形及安装举例/Outline and mounting type

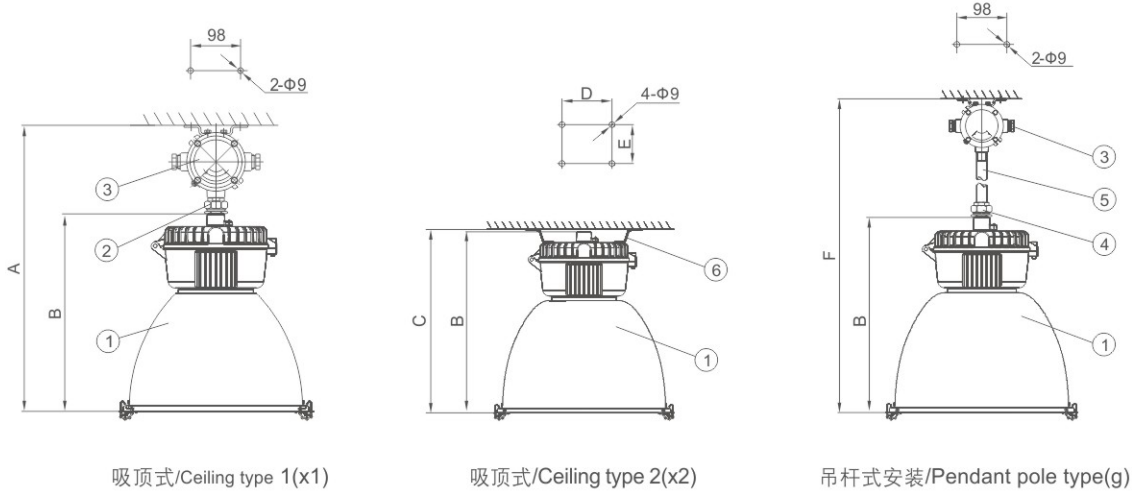

壳体 Enclosure	尺寸 / Size					
	A	B	C	D	E	F
I 型 Type I	627	460	465	251	65	897
II 型 Type II	687	520	525	233	232	957

序号 No.	名称 Name	备注 Remark
1	FAD-T防水防尘防腐工矿灯(A型) FAD-T Weatherproof Industrial Lamps(Type A)	
2	防腐活接头FHJ-G 3/4"(外)/G 3/4"(外) Weatherproof flexible connector FHJ- G3/4" (male)/ G3/4"( male)	
3	防水防尘防腐接线盒FHD-G 3/4"K Weatherproof junction box FHD-G3/4"K	
4	防腐活接头FHJ-G 3/4"(内)/G 3/4"(外) Weatherproof flexible connector FHJ- G3/4" (female)/ G3/4"( male)	用户自备 Supplied by user
5	直杆 G 3/4" Straight pole G 3/4"	300mm
6	安装架 Mounting frame	