
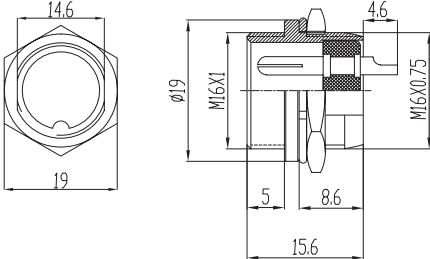

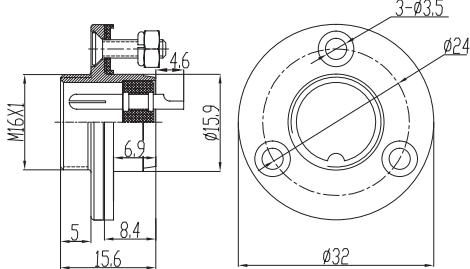

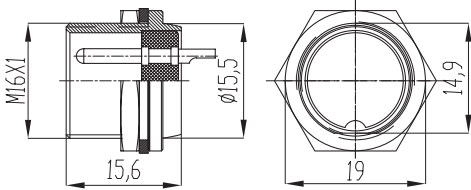

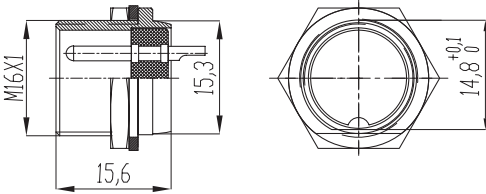

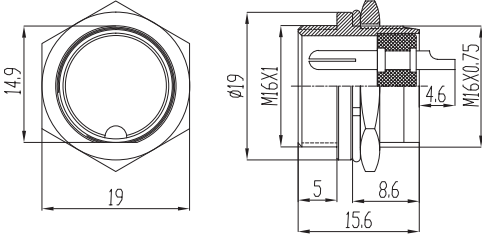

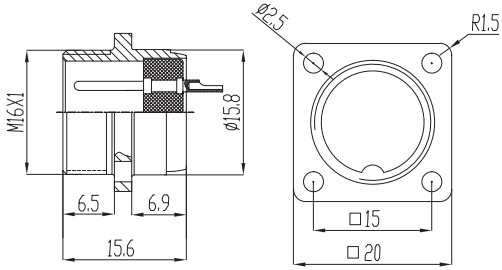

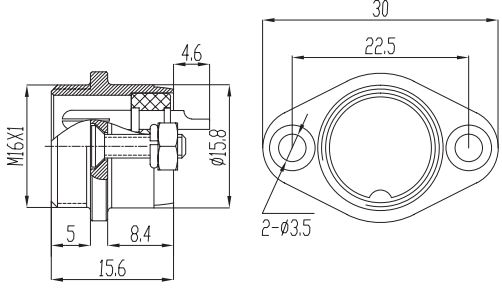

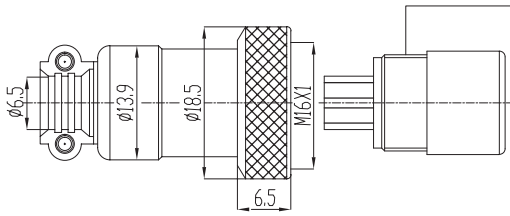

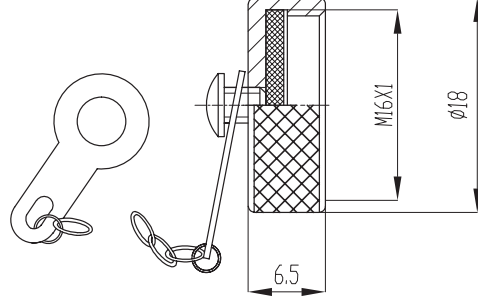

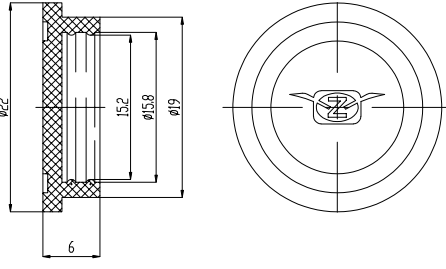



图 例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
双切面定位插座 Socket IP55 		2 3 4 5 6 7 8 9 10	16M-2B 16M-3B 16M-4B 16M-5B 16M-6B 16M-7B 16M-8B 16M-9B 16M-10B
三眼法兰公插座 Three eye flange socket IP55 		2 3 4 5 6 7 8 9 10	16M-2E 16M-3E 16M-4E 16M-5E 16M-6E 16M-7E 16M-8E 16M-9E 16M-10E
穿墙单切面公插座 Single milling face male socket IP55 		2 3 4 5 6 7 8 9 10	16M-2F 16M-3F 16M-4F 16M-5F 16M-6F 16M-7F 16M-8F 16M-9F 16M-10F
双铣边穿墙公插座 Double milling face male socket IP55 		2 3 4 5 6 7 8 9 10	16M-2F1 16M-3F1 16M-4F1 16M-5F1 16M-6F1 16M-7F1 16M-8F1 16M-9F1 16M-10F1
单切面定位插座 Single milling face allocation socket IP55 		2 3 4 5 6 7 8 9 10	16M-2G 16M-3G 16M-4G 16M-5G 16M-6G 16M-7G 16M-8G 16M-9G 16M-10G

图例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
方形法兰公插座 Square flange socket IP55 		2 3 4 5 6 7 8 9 10	16M-2H 16M-3H 16M-4H 16M-5H 16M-6H 16M-7H 16M-8H 16M-9H 16M-10H
双眼法兰插座 Two eyes flange socket IP55 		2 3 4 5 6 7 8 9 10	16M-2X 16M-3X 16M-4X 16M-5X 16M-6X 16M-7X 16M-8X 16M-9X 16M-10X
螺纹直式电缆插头 Thread straight cable plug IP55 		3 4 5 10	16M-3A1 16M-4A1 16M-5A1 16M-10A1
座金属防尘盖 Metal dust cap IP55 			16M-ZGJ
塑料防尘盖 Plastic dust cap IP55 			16M-ZGS




孔位排列 (从针的方向看)

The hole place arranges(Comply with the needle direction)

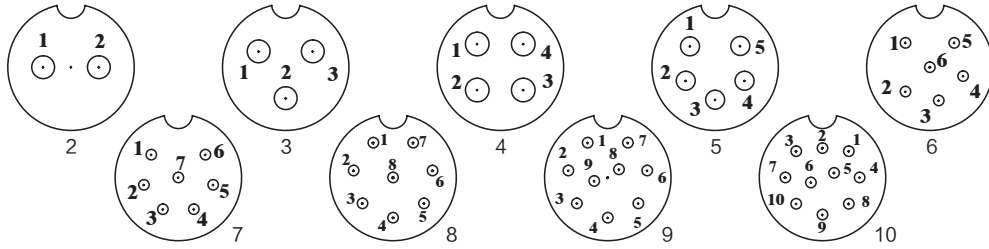

安装方式

Assemble way

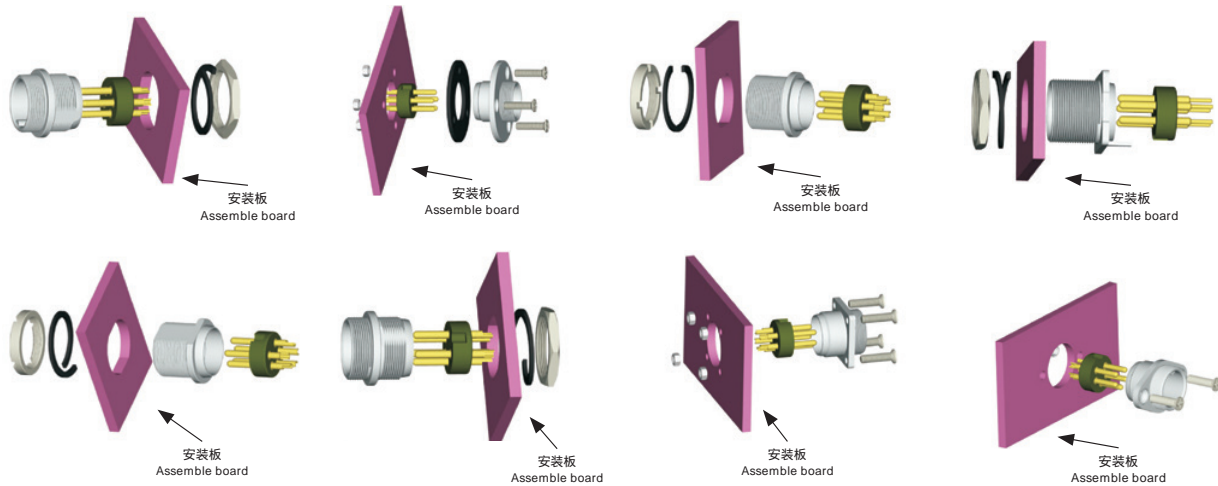

材料和技术方式

Material and specifications

接插方式 Coupling	螺纹连接 Threaded coupling	接线方式 Termination	焊接 Solder
外壳材料 Shell material	锌基合金 (镀镍) Zinc alloy with nickelplate	接插次数 Mating cycle	500次 500
绝缘体 Insert material	电木 bakelite	温度范围 Temperature range	-20°C ~ +85°C
接触体材料 Contact material	铜 (镀银/金) copper(silverplated/gold)	电缆直径 Cable diameter	φ 7.5mm ~ ≤ φ 8.5mm

技术参数

Technology parameter

芯数 NO.of contacts	2	3	4	5	6	7	8	9	10
额定电流 / 电压 Rated current/voltage	10A/125V	10A/125V	10A/125V	7A/125V	5A/125V	5A/125V	5A/125V	5A/125V	5A/125V
工作电压 (AC.V) 分钟 Operation limit voltage(AC.V.rms)	200	200	200	200	200	200	200	200	200
耐电压 (AC.V) 分钟 Withstanding voltage(AC.V.rms) 1 minute	1500	1500	1500	1500	1500	1500	1500	1500	1500
绝缘阻抗 (M Ω) DC500V Insulation resistance(MΩ MIN.) at DC 500V	1500	1500	1500	1500	1500	1500	1500	1500	1500
接触阻抗 (m Ω) DC1A Contact resistance (mΩ MAX.) AT DC 1A	5	5	5	5	5	5	5	5	5
焊杯口径 (mm) Solder cup mouth aperture	1.6	1.6	1.6	1.2	0.9	0.9	0.9	0.9	0.9
接触体孔径 (mm) Solder inter diameter	2.45	2.45	2.45	2	1.15	1.15	1.15	1.15	1.15