# JVS-XD2832-HE20K


32CH 4MN XVR




## Key Features

- AHD, TVI, CVI, CVBS, IP video input.
- Automatic networking support.
- Cloud services, P2P.
- H.264+ (Quasi H.265) video compressions.
- Third-party network cameras supported.
- Support IVP.

## Description

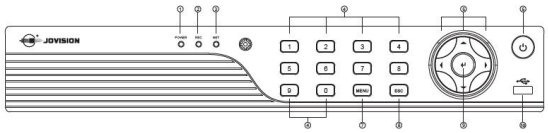

| Index | Description | Index | Description |
|---|---|---|---|
| ① | Power Light | ⑥ | start |
| ② | Video light | ⑦ | MENU |
| ③ | Network indicator light | ⑧ | ESC |
| ④ | Number | ⑨ | Enter |
| ⑤ | Direction | ⑩ | USB |

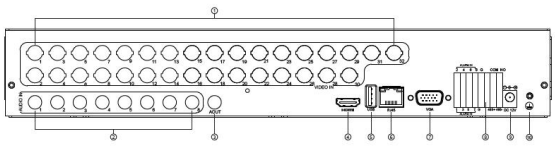

| Index | Description | Index | Description |
|---|---|---|---|
| ① | VIDEO IN | ⑥ | LAN Network Interface |
| ② | AUDIO IN | ⑦ | VGA Interface |
| ③ | AUDIO OUT | ⑧ | Alarm& RS-485 |
| ④ | HDMI Interface | ⑨ | 12V DC Power Input |
| ⑤ | USB Interface | ⑩ | Ground |

## Specifications

| Model | JVS-XD2832-HE20K |
|---|---|
| **Video and Audio** | |
| **Analog Camera Input** | 32CH, BNC |
| **HDCVI Camera** | 1080p@25/30fps, 720p@25/30fps |
| **AHD Camera** | 4MP, 1080p@25/30, 720p@25/30fps |
| **TVI Camera** | 1080p@25/30, 720p@25/30fps |
| **CVBS Camera** | PAL/NTSC |
| **IP Camera Input** | Up to 1080P |
| **Video Port Configuration** | Full HD: 32CH |
| | Hybrid: 16CH+16CH |
| | Full Network: 32CH |
| **Audio In/Out** | 8/1, RCA |
| **Two-way Talk** | 1CH RCA |
| **Recording** | |
| **Compression** | H.264+/H.264 |
| **Resolution** | 4M-N, 1080N, 720p, WD1 |
| **Record Rate** | Main Stream: 4M-N(1~8fps), 1080N(1~18fps), 720P/960H/D1(1~18fps) |
| | Sub stream: D1/CIF(1~8/12fps) |
| **Record Mode** | Manual, Schedule (General, Continuous), MD (Motion Detection, Video Loss, IVP), Alarm Device |
| **Audio Compression** | G.711U |
| **Display** | |
| **Interface** | 1x HDMI, 1x VGA |
| **Resolution** | 1280x1024, 1024x768, 1280x800, 1440x900, 1920x1080 |
| **OSD** | Device ID, Time, Record Setting, Alarm Setup, Audio, Camera Title |
| **Network** | |
| **Interface** | 1 RJ45 Port (100M) |
| **Network Function** | TCP/IP, DHCP, DNS, DDNS, HTTPS, HTTP, |
| **Smart Phone** | iPhone, Android |
| **Interoperability** | ONVIF 2.4 |
| **Playback and Backup** | |
| **Playback** | 8ch 4.0MP/16ch 2.0MP |
| **Search Mode** | Time /Date, Alarm, MD, IVP, Auto, Scheduled |
| **Playback Function** | Day View, Hour View, Back Step, Rewind, Pause, Play, Fast Forward, Slow, Step, Snap, Sound ON/OFF, Zoom, Backup to U-Disk |
| **Backup Mode** | USB |
| **HDD** | |
| **Interface Type** | 2 SATA Interface |
| **Capacity** | Up to 6 TB |
| **General** | |
| **Power Supply** | DC12V |
| **Consumption** | ≤ 20W |
| **Working Temperature** | 0°C~ 55°C |
| **Working Humidity** | 10% to 90% |
| **Dimensions** | 405x338x135mm |
| **Weight** | ≤ 3Kg |

©2022 Jovision Technology Co., Ltd. All rights reserved.

Note: Design and specifications are subject to change without notice. Under no circumstances, this document shall be reproduced, distributed or changed partially or wholly without formal authorization of Jovision Technology Co., Ltd