

# JVS-N410K-SDL


4K Metal Bullet Full-Color Network Camera



## Features

- Resolution 3840\*2160@15fps
- Full-Color
- 4x IR LEDs + 4x Warm LEDs
- Support Humanoid Detection
- With Internal PoE
- Built-in Mic
- Ingress Protection IP66

## Dimension(mm)

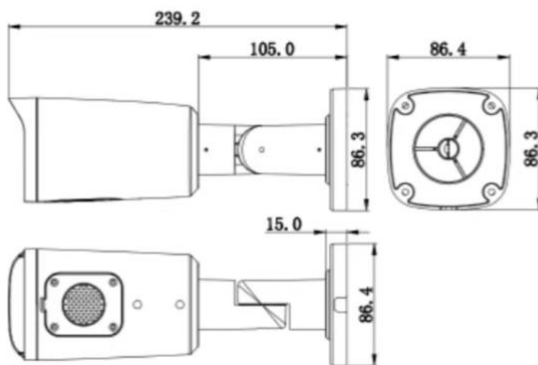

## Specifications

| Video                  |                                                                                   |
|------------------------|-----------------------------------------------------------------------------------|
| Image Sensor           | 1/3" CMOS                                                                         |
| Max Resolution         | 3840*2160                                                                         |
| Effective Pixels       | 8MP                                                                               |
| Compression Standard   | H.265/H.264                                                                       |
| Frame Rate             | 15 fps                                                                            |
| Bit Rate               | 682K bps~5461K bps                                                                |
| SNR (dB)               | 52dB                                                                              |
| Min. Illumination      | 0Lux (IR ON)                                                                      |
| Lens                   |                                                                                   |
| Lens                   | 4mm,M12                                                                           |
| FOV                    | H: 78.5°, V: 42.8° D: 92.6°                                                       |
| IR-LEDs                | 28μx4 LEDs                                                                        |
| IR-Distance            | Up to 40 Meters                                                                   |
| Function               |                                                                                   |
| Exposure Control       | Support                                                                           |
| White Balance          | Auto                                                                              |
| Image Enhancement      | BLC/HLC                                                                           |
| Privacy Mask           | Support 4 Rectangle Areas                                                         |
| Image Setting          | Rotate, Saturation, Brightness, Contrast, Sharpness                               |
| Day And Night Function | Day And Night Automatic Switching                                                 |
| Intelligent Analysis   | Support Region Intrusion, Line Crossing, Human Detection                          |
| Alarm Method           | Email Alarm                                                                       |
| Remote Operation       | System, Stream, Alarm, Network Management                                         |
| Expansion Interface    | N/A                                                                               |
| Network                |                                                                                   |
| Ethernet               | 10M/100M Ethernet ,1 RJ45                                                         |
| Stream                 | 2x Streams                                                                        |
| Protocols              | TCP/IP,RTSP,RTP,HTTP,DNS,DDNS,DHCP,FTP, NTP,UPNP                                  |
| ONVIF                  | ONVIF 2.4                                                                         |
| Network transmission   | CloudSEE 2.0                                                                      |
| Browser                | IE8.0 And Above (Device Embedded Web Server), Edge,Chrome,Safari Browser Browsing |
| User                   | Up to 13 Users                                                                    |
| General                |                                                                                   |
| Power Supply           | DC12V or PoE                                                                      |
| Power Consumption      | <3W (During Day); <6W (At Night With IR)                                          |
| Working Temperature    | -20°C ~ 60°C                                                                      |
| Working Humidity       | 0% ~ 90% Rh                                                                       |
| Material               | Metal                                                                             |
| Dimensions (WxHxD)     | 240*86*86mm                                                                       |
| Weight                 | 500g                                                                              |
| Waterproof             | IP66                                                                              |