JVS-ND9132-HZ

32CH 8x SATA H.265 NVR




Key Features

- Adopt the New Vstar GUI , Easy to Operate and Run Smoothly
- Support 4K Output
- Support 4K IP Cameras Input
- Support Audio Input and Output;
- Support Alarm Input and Output, 16 In 4 Out
- Support 8x SATA , Up to 10TB Each
- Support RS485

Description



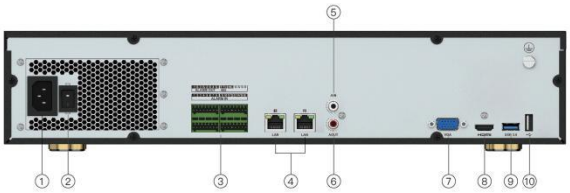

Index	Description	Index	Description
①	Power In	⑥	Audio Out
②	On-Off	⑦	VGA
③	Alarm/RS485	⑧	HDMI
④	RJ45	⑨	USB 3.0
⑤	Audio In	⑩	USB

Specifications

Model	JVS-ND9132-HZ
Video & Audio	
IP Camera Input	32 Channel
Video Output	HDMI: 4K@60Hz/ 4K@30Hz/ 2K@60Hz/ 2K@30Hz/ 1920x1080/ 1440x900/ 1280x1024/ 1280x720/ 1024x768
	VGA: 1920x1080
Audio In & Out	Support
Compression	H.265/ H.264
Max Decoding	4K/5.0MP/4.0MP/1080P/960P/720P 30fps
Bandwidth I/O	400Mbps/320Mbps
Storage	
SATA	8x SATA Interface
Capacity	Up to 10TB Max.
File Format	Log: *.txt/ Picture: *.JPG/ Video: *.mp4
Backup Mode	USB 3.0 Device FAT32/ NTFS/ exFAT
Video	
Video Playback	Auto/ Timing/ Alarm/ Motion Detection/ Intelligent Analysis
Sync Playback	1ch 4K,2ch 5.0MP,3ch 4.0MP,4ch 3.0MP,4ch 1080P
Search Mode	Channel Number/ Recording Type/ Date
Network	
Ethernet	100/1000Mbps
Network Function	TCP/IP, UDP/IP, CloudSEE, SMTP, NTP, DHCP
Interoperability	ONVIF 2.4, CloudSEE 2.0
Smart Phone	iPhone, Android
Hardware	
Network Interface	2x RJ45
USB Interface	3x USB2.0, 1xUSB3.0
PTZ Interface	RS485
Controlling Device	Mouse
Alarm Input	16CH
Alarm Output	4CH
Special	
Multi-Screen Display	1/ 4/ 5/ 6 up to 32
Alarm Method	Buzzer, Push to App, Email Alarm, External Alarm
Digital Zoom	Support
General	
Power Supply	ATX
Consumption	≤ 30 W (Without HDD)
Working Temperature	-10°C ~ 55°C
Working Humidity	10% ~ 90%
Dimensions	445x90.5x430(mm)
Weight	≤ 8Kg (Without HDD)

©2024 Jovision Technology Co., Ltd. All rights reserved.
Note: Design and specifications are subject to change without notice. Under no circumstances, this document shall be reproduced, distributed or changed partially or wholly without formal authorization of Jovision Technology Co., Ltd