

JVS-N3122SL


2.0MP Starlight PoE Dome Camera



Key Features

- Resolution 1920x1080@20fps.
- Ingress Protection IP66.
- PoE IEEE 802.3af.
- 18x IR-LED, Up to 20 Meters.
- Supports CloudSEE APP on iOS/Android.
- ONVIF 2.4, Compatible with ONVIF Recorder.
- Support Behavior analysis.

Dimensions (mm)

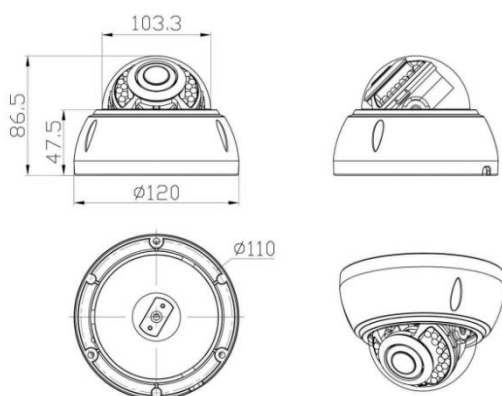

Accessory



AU1004

Specifications

Video	
Image Sensor	1/2.7" CMOS
Max Resolution	1920x1080
Effective Pixels	2.0MP
Compression Standard	H.265/H.264
Maximum Frame Rate	1080p@30fps / 960p@25fps
SNR(dB)	38.4dB
Bit Rate	Main: 261Kbps~8129Kbps Sub: 87~3480Kbps
Illumination	0.05Lux
Lens	
Lens	2.8mm / 3.6mm
Viewing Angle	2.8 mm: H 92.5°, V 59.9°, D: 108.5° 3.6 mm: H 79.6°, V 47.7°, D: 97.8°
IR-LEDs	18x IR LEDs
IR-Distance	Up to 20 Meters
Function	
Motion Detection	Support
Email Alert	Support
Day& Night	Support
Recording	Support (NVR, Windows PC, Smartphone)
DHCP	Support
Pan/Tilt	Not Supported
Audio Input	Support (Ext. Mic)
Audio Codec	Support (G711A/G711U)
SD-Card	Not Supported
Privacy Mask	Support up 8 areas
Exposure Control	Support
Image Adjustment	Support
Auto. White Balance	Support
Image Rotation	Support (Mirror/Flip)
Intercom	Not Supported
FTP	Not Supported
Behavior Analysis	Behavior Analysis Line crossing detection, intrusion detection, people counting
Network	
Ethernet	10M/100M Ethernet, RJ45 Port
Protocols	HTTP, TCP/IP,UDP, ICMP, RTSP, RTP, RTCP, SMTP, DHCP, DNS
Stream	2x Streams
LAN	Support
ONVIF	ONVIF 2.4
User	Up to 13 Users
Browser	IE8+, Chrome18+ ~ 42-
Smart Phone	iOS/Android
General	
Dimensions (WxHxD)	φ120x90 (mm)
Weights	500g
Material	Aluminum
Working Temperature	-30℃~60℃(-22℉~140℉)
Humidity	RH 10%~90%
Power Supply	DC12V/2A, PoE (IEEE 802.3af)
Consumption	Day ≤3W; Night ≤7W
Waterproof	IP66